



A2150

Punte per foratrice fondo piatto per pannelli fonoassorbenti

Flat shape drilling bits for acoustic panels


INFO ORDINE / ORDER INFO

Per ordini di oltre 10 pezzi sconto 15%
For 10 peces order 15% discount

DESCRIZIONE / DESCRIPTION

Punta da foratrice con tagliente in diamante PCD. La forma del tagliente è piatta leggermente raggiata sul diametro massimo. Questa caratteristica le permette, insieme alla vite micrometrica di regolazione poste alla fine del gambo di eseguire fori ciechi con la superficie finale precisa e continua. Ideale per lavorazioni di pannelli che debbano, come nel caso dei pannelli fono assorbenti, avere uno strato di materiale restante di spessore tassativo.

Drill bit with PCD diamond cutting edge. The shape of the cutting edge is flat with a slight radius on the maximum diameter. This feature allows it, together with the micrometric adjustment screw placed at the end of the shank, to perform blind holes with a precise and continuous final surface. Ideal for processing panels which, as in the case of sound-absorbing panels, must have a remaining layer of material of mandatory thickness

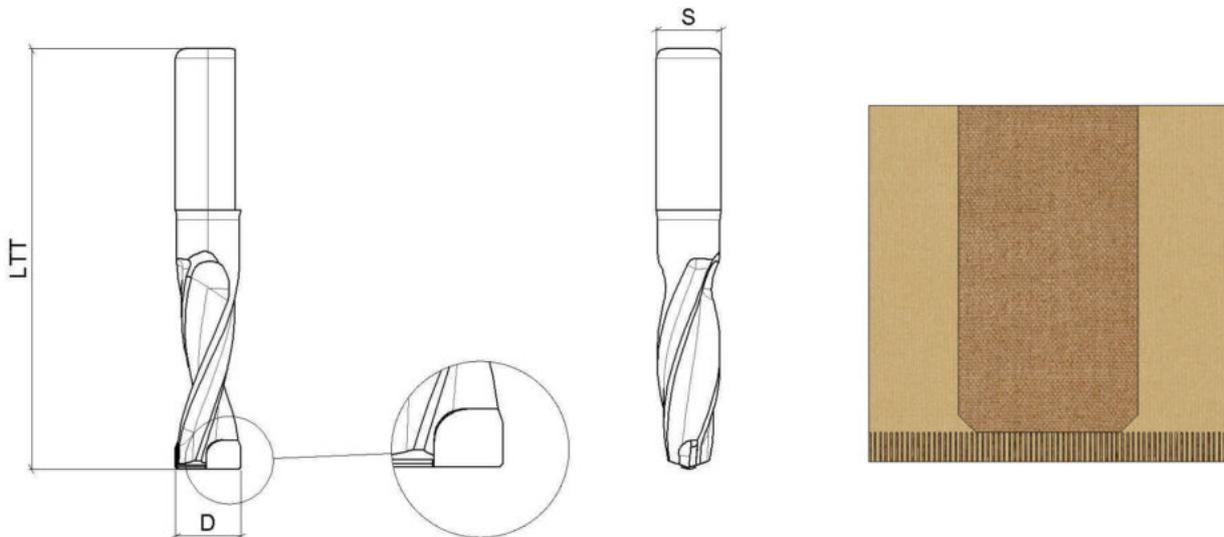

DATI TECNICI / TECHNICAL DATA

ART	COD	DRW	D	B	LTT	Z	ROT	S
A2150	001	96919	8	32	65	2	Dx - Rh	10
A2150	002	96920	8	32	65	2	Sx Lh	10
A2150	003	96921	10	32	65	2	Dx - Rh	10
A2150	004	96922	10	32	65	2	Sx Lh	10
A2150	005	96923	12	32	65	2	Dx - Rh	10
A2150	006	96924	12	32	65	2	Sx Rh	10